AQUA SALT PROTECTION

Anti Efflorescence Sealer

PRODUCT DESCRIPTION



A sealer based on salt resistance properties having excellent adhesion and sealing properties. It gives a smooth surface for the application of subsequent top coat. It also has antifungal & antibacterial properties.

- LEAD FREE
- WEATHER PROOF
- ANTI FUNGAL
- WATER PROOFING

PRODUCT INFORMATION

Pack Size




0.91 Liter | 3.64 Liters | 18.2 Liters

Coverage

FOR INTERIOR
145-160 Sft/Ltr/1 Coat

FOR EXTERIOR
145-160 Sft/Ltr/1 Coat

*Depending on Surface

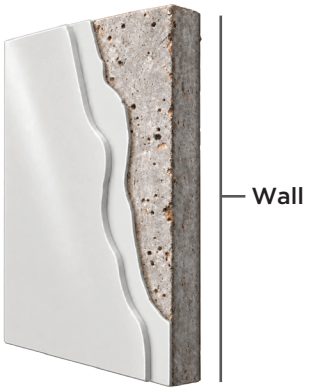

SURFACES

- Interior/Exterior Plaster
- Masonry
- Asbestos
- Concrete

METHOD OF APPLICATION

- Clean the surface thoroughly with a wire brush, wash with water, and allow it to dry completely
- Apply two coats of Aqua Salt Protection, diluted with 60–70% clean water, allowing an interval of 4–6 hours between coats
- Apply suitable emulsion coat over Aqua Salt Protection

AQUA SALT PROTECTION

Anti Efflorescence Sealer

SHADES

***Only Available in White**

PRODUCT SPECIFICATION

Pigments	Alkali & Salt Resistance Extenders & Pigment
Thinning	60-70% (By Volume)
pH	8.5 - 9.0
Touch Dry	30 Minutes
Hard Dry	4-6 Hours (Recoat)
Sp. Gr.	1.09 ± 0.03
Finish	Smooth
Pot Life after Thinning	12 Hours Maximum
Application Method	Brush, Roller
Storage	12 months in a sealed container stored in a cool & dry place